


VNX-ADV

MODULE COMPATIBLE WITH VELUX® SML100 EXTERIOR BLIND ACTUATOR

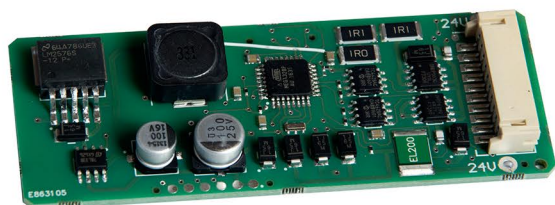

Technical specifications:

Input voltage range	15...25V DC
Maximal current consumption	0.65A
Current consumption while operation	approx. 0.35A
Stand-by current consumption	0.02A
Operating temperature range	-25....+85°C

VNX-ADV module is compatible with VELUX® SML100 exterior blind actuator drive.

It allows interfacing the drive to a wide variety of an intelligent building systems (i.e. KNX, LCN, Loxone, MODBUS)

Features

- automatic shutdown on overload detection (overload protection)
- automatic shutdown once the limit position is reached (full open/close)
- protection of a supply line from overloading
- control over module is strictly electronic, with no mechanical components incorporated (no relays) what significantly extends the reliability in time
- provides a handy terminal interface for re-programming default torque limit shutdown values separately for either direction by using VNX SETUP TOOL

Warranty

Product is covered with 24 months warranty

Compatibility

Product comply with IEC 63044-3 standard.

LEGAL DISCLAIMER

Any alteration made to the VELUX® products using our units voids VELUX® warranty.

You are asked to remove the CE-marking from the modified VELUX® product, as when modified, it is no longer in force.

Your installation has to be protected against unexpected movement and provide a safety against entrapment and meet other requirements in accordance with applicable regulations.

VELUX®, io-homecontrol® are a registered trademarks and belong to their respective owners,